# 6834|37

# Ceiling unit Novy Pureline 90 cm White

EAN 5414425116553

### **Energy label**

■ Energy Efficiency class (EElhood)	A++
<ul> <li>Annual Energy Consumption (kWh/year) (AEChood)</li> </ul>	24,7
<ul> <li>Fluid Dynamic Efficiency class (FDEhood)</li> </ul>	Α
Lighting Efficiency class (LEhood)	-
<ul> <li>Grease Filtering Efficiency class (GFEhood)</li> </ul>	Е

#### **Functions & features**

• Motor	Integrated & Remote
Sound absorber	Integrated
■ Recirculation	Optional
■ InTouch function	Standard
- Auto stop	
<ul><li>Delayed switch off (minutes)</li></ul>	10/30
■ Grease filter	6830020
Number of grease filters	2
Grease filter cleaning indication	
<ul> <li>Recirculation filter cleaning indication</li> </ul>	
<ul> <li>Control method</li> </ul>	Push buttons + Remote control
Number of speeds	3 + power
<ul> <li>Automatic Power revert (minutes)</li> </ul>	6

#### **Dimensions**

Product dimensions (WxDxH) (mm)	868 x 508 x 319
Height incl. mounting clamps (without motorbox) (mm)	133
• Width flange (mm)	15
<ul><li>Dimensions cut-out opening (WxD) (mm)</li></ul>	845 x 485
<ul> <li>Advised mounting height induction hobs (Hmin-Hmax) (mm)</li> </ul>	600 - 1600
<ul> <li>Advised mounting height gas hobs (Hmin-Hmax) (mm)</li> </ul>	650 - 1600
<ul> <li>Advised mounting height ceramic hobs (Hmin-Hmax) (mm)</li> </ul>	600 - 1600
<ul><li>Diameter outlet (mm)</li></ul>	150
Position exhaust	Top, Right, Left, Front, Back

### Lighting

<ul><li>Functional light dimmable</li><li>Soft-ON/OFF</li><li>External light connector</li></ul>	- - 220-230V / max 300W / Not Dimmable

## Airflow and noise level


- Free airflow (m³/h)
   Airflow (m³/h) measured according to EN 61591
- Sound regulation according to EN 60704-2-13

<ul> <li>Airflow duct out speed 1 (m³/h) / Max pressure duct out speed 1 (Pa)</li> </ul>	256 / 86
<ul> <li>Airflow duct out speed 2 (m³/h) / Max pressure duct out speed 2 (Pa)</li> </ul>	417 / 253
<ul> <li>Airflow duct out speed 3 (m³/h) / Max pressure duct out speed 3 (Pa)</li> </ul>	549 / 382
Airflow duct out max powerspeed (m³/h) (Qboost) / Max pressure duct of	ut624 / 382
max powerspeed (Pa)	

- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 24 / 35
   1 (dB(A))
- $\blacksquare$  Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 35 / 47 2 (dB(A))
- $^{\bullet}$  Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 42 / 55 3 (dB(A))
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct 46 / 58 out at max powerspeed (dB(A)) (LWAboost)

## **Technical specifications**

Maximum power (W)	105
■ Voltage appliance (V)	220-240
■ Frequency (Hz)	50-60
<ul><li>Power consumption in stand-by-mode (Ps) (W)</li></ul>	0.29
■ Net weight (kg)	21,7
<ul><li>Length power supply cable (m)</li></ul>	1,2

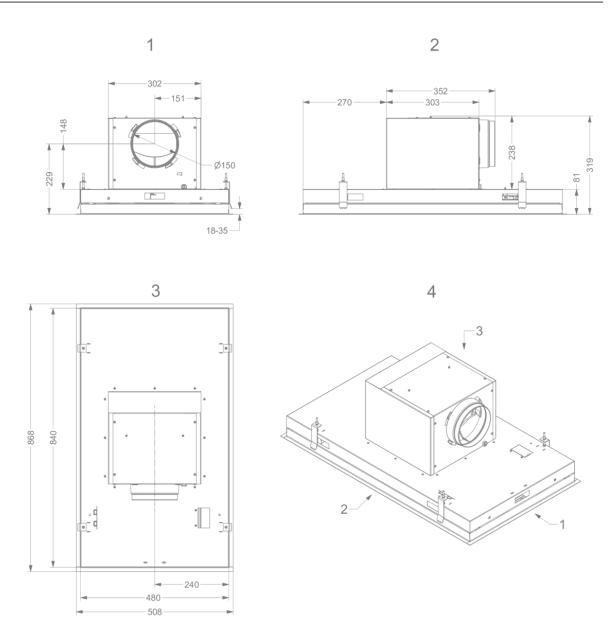

Installation accessories	5	6834 37
Dissociated motor - 800997		Kit to install remote motor Novy Pureline (Pro)
Extension cable 7000094		Extension cable for remote motor - 5 m
Accessories		
Recirculation box		
	841400	Exhaust box with monoblock filter
	842400	Exhaust box with monoblock filter
	843400	Exhaust box with monoblock filter
	7931400	Exhaust box with monoblock filter



7932400

Exhaust box with monoblock filter



7933400

Recirculation box with monoblock filter

# Adapter for limited installation height



6830053

Adapter limited installation height for Novy Pureline (Pro)

#### **Control kit**



990030

Kit connection with external cover and/or lighting

<sup>\*</sup> For duct work compatibilities & accessories visit www.novy.com

6834|37

