

**Wall mounted
Flatline 90 cm
Black**



EAN 5414425195473

Energy label

▪ Energy Efficiency class (EEIhood)	A+
▪ Annual Energy Consumption (kWh/year) (AEChood)	34,1
▪ Fluid Dynamic Efficiency class (FDEhood)	A
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	D

Functions & features

▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Optional
▪ InTouch function	Optional
▪ Auto stop	▪
▪ Delayed switch off (minutes)	10
▪ Grease filter	7400020
▪ Number of grease filters	1
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪
▪ Control method	Push buttons
▪ Number of speeds	3 + power
▪ Automatic Power revert (minutes)	6

Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	898 x 554 x 660 - 1050
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	898 x 554 x 730 - 1120
▪ Max height optional chimney exhaust (mm)	1410
▪ Max height optional chimney recirculation (mm)	1480
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	600 - 750
▪ Diameter outlet (mm)	150
▪ Position exhaust	Top

Lighting

▪ Functional lighting type	LED
▪ Functional light dimmable	▪
▪ Soft-ON/OFF	▪
▪ Number of functional lights	4
▪ Total energy consumption functional light (W)	12
▪ Color functional light (K)	2700

Airflow and noise level


▪ Free airflow (m ³ /h)	815
------------------------------------	-----

Airflow and noise level

- Airflow (m³/h) measured according to EN 61591
- Sound regulation according to EN 60704-2-13
- Airflow duct out speed 1 (m³/h) / Max pressure duct out speed 1 (Pa) 233 / 70
- Airflow duct out speed 2 (m³/h) / Max pressure duct out speed 2 (Pa) 415 / 248
- Airflow duct out speed 3 (m³/h) / Max pressure duct out speed 3 (Pa) 551 / 384
- Airflow duct out max powerspeed (m³/h) (Qboost) / Max pressure duct out max powerspeed (Pa) 635 / 385
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 1 (dB(A)) 24 / 35
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 2 (dB(A)) 36 / 47
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 3 (dB(A)) 44 / 55
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct out at max powerspeed (dB(A)) (LWAboost) 46 / 57

Technical specifications

- | | |
|---|------|
| ▪ Maximum power (W) | 118 |
| ▪ Voltage cooker hood (V) | 230 |
| ▪ Frequency (Hz) | 50 |
| ▪ Power consumption in stand-by-mode (Ps) (W) | 0.25 |
| ▪ Net weight (kg) | 28,7 |
| ▪ Length power supply cable (m) | 1,3 |

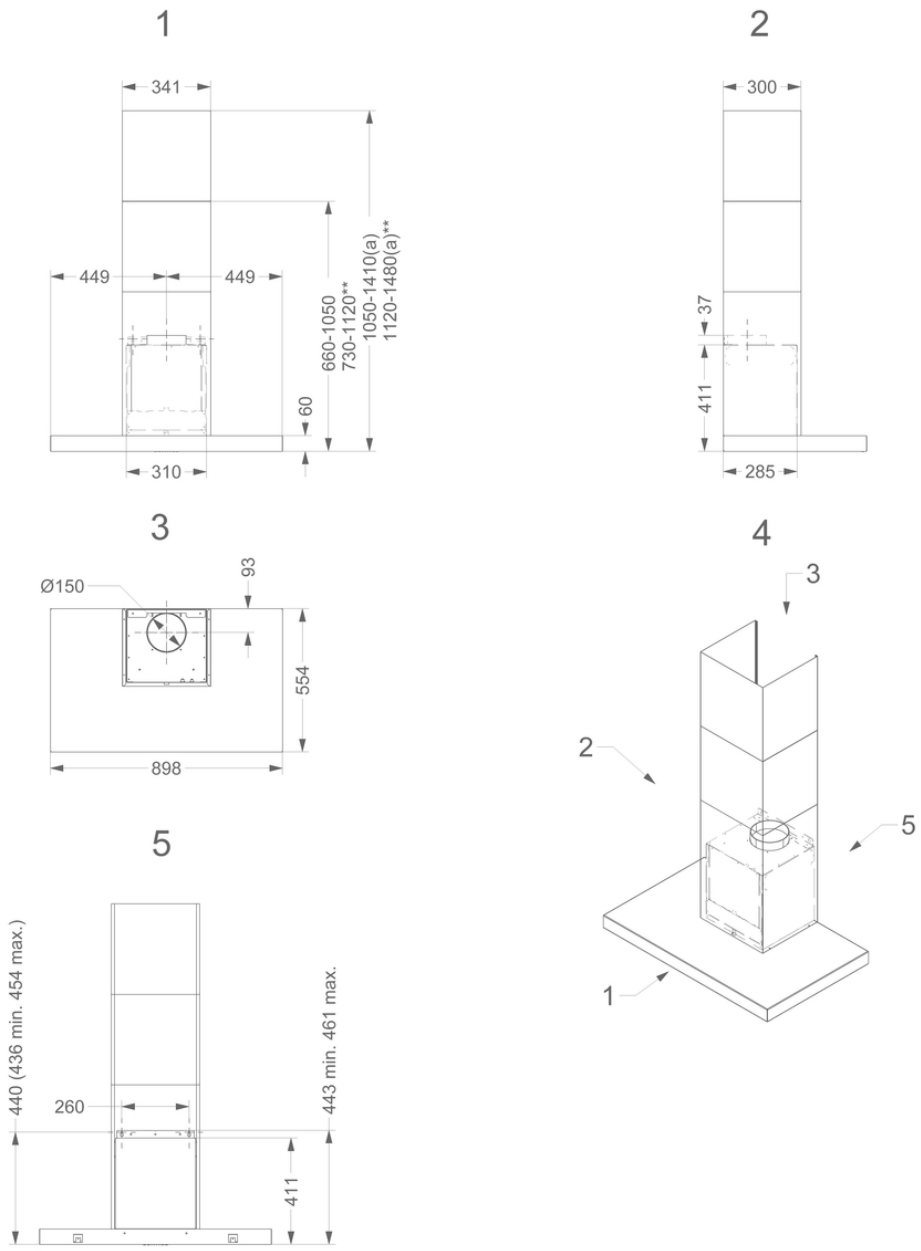

Installation accessories

Back panel & chimney extensions

- 7602100 Chimney extension 90 cm
- 152200 Backsplash panel 90 cm black height 69 cm

Accessories

Recirculation kit



7600400

Recirculation set Novy Flatline wall 90, 120 cm

Control kit



990026

InTouch Kit incl. remote control



990030

Control kit for external lighting or valve

