

**Island mounted**  
**Flatline 90 cm**  
**Stainless steel**



EAN 5414425076406

## Energy label

▪ Energy Efficiency class (EElhood)	A+
▪ Annual Energy Consumption (kWh/year) (AEChood)	30,9
▪ Fluid Dynamic Efficiency class (FDEhood)	A
▪ Lighting Efficiency class (LEhood)	A
▪ Grease Filtering Efficiency class (GFEhood)	F

## Functions & features

▪ Motor	Integrated
▪ Sound absorber	Integrated
▪ Recirculation	Optional
▪ InTouch function	Optional
▪ Auto stop	▪
▪ Delayed switch off (minutes)	10
▪ Grease filter	7400020
▪ Number of grease filters	1
▪ Grease filter cleaning indication	▪
▪ Recirculation filter cleaning indication	▪
▪ Control method	Push buttons
▪ Number of speeds	3 + power
▪ Automatic Power revert (minutes)	6

## Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	900 x 600 x 563 - 730
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	900 x 600 x 679 - 860
▪ Max height optional chimney [a] exhaust (mm)	1040
▪ Max height optional chimney [b] exhaust (mm)	1350
▪ Max height optional chimney [b] recirculation (mm)	1480
▪ Advised mounting height induction hobs (Hmin-Hmax) (mm)	650 - 850
▪ Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 850
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	600 - 850
▪ Diameter outlet (mm)	150
▪ Position exhaust	Top

## Lighting

▪ Functional light dimmable	▪
▪ Soft-ON/OFF	▪
▪ Number of functional lights	4
▪ Total energy consumption functional light (W)	8

## Airflow and noise level

▪ Free airflow (m³/h)	815
▪ Airflow (m³/h) measured according to EN 61591	

## Airflow and noise level





---

- Sound regulation according to EN 60704-2-13
- Airflow duct out speed 1 (m<sup>3</sup>/h) / Max pressure duct out speed 1 (Pa) 277 / 66
- Airflow duct out speed 2 (m<sup>3</sup>/h) / Max pressure duct out speed 2 (Pa) 467 / 237
- Airflow duct out speed 3 (m<sup>3</sup>/h) / Max pressure duct out speed 3 (Pa) 620 / 382
- Airflow duct out max powerspeed (m<sup>3</sup>/h) (Qboost) / Max pressure duct out 707 / 382 max powerspeed (Pa)
- Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed 24 / 35 1 (dB(A))
- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 34 / 46 2 (dB(A))
- Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 41 / 53 3 (dB(A))
- Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct 44 / 56 out at max powerspeed (dB(A)) (LWAbost)

## Technical specifications

---

- |   |      |
|---|------|
| ▪ Maximum power (W)                           | 118  |
| ▪ Voltage cooker hood (V)                     | 230  |
| ▪ Frequency (Hz)                              | 50   |
| ▪ Power consumption in stand-by-mode (Ps) (W) | 0.25 |
| ▪ Net weight (kg)                             | 38,8 |
| ▪ Length power supply cable (m)               | 1,3  |

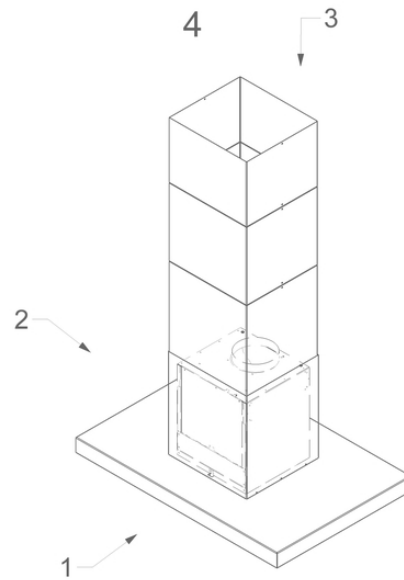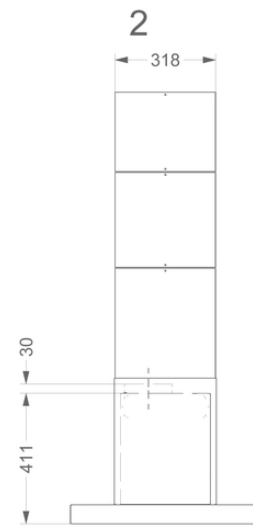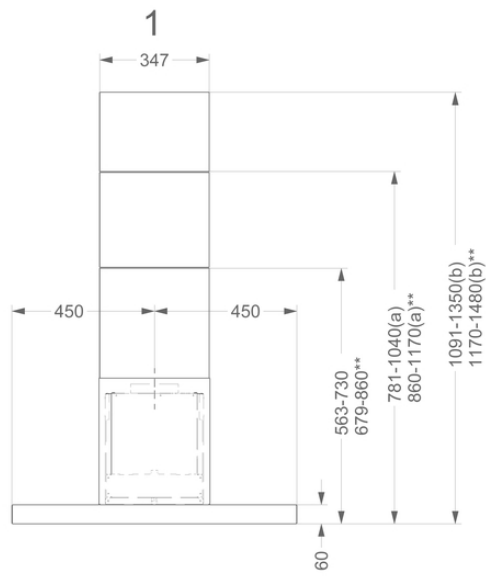

## Installation accessories

---

### Back panel & chimney extensions

- 7640100 Chimney extension option A stainless steel
- 7640101 Chimney extension option B stainless steel


### Additional accessories

- 840029 Remote control

## Accessories

---

### Recirculation kit



7640400

Recirculation set Novy Flatline island

### Control kit



990030

Control kit for external lighting or valve

