NOVY Technical File

7856|01

Wall mounted Vision 75 cm Black

EAN 5414425221929



Α

Energy label

Lighting Efficiency class (LEhood)

Functions & features

Integrated
Integrated
Standard, Monoblock
Optional
30
7830020
2
Touch control
3 + power
6

Dimensions

Product dimensions exhaust (WxDxHmin-Hmax) (mm)	748 x 426 x 517 -
 Product dimensions recirculation (WxDxHmin-Hmax) (mm) 	748 x 426 x -
 Advised mounting height induction hobs (Hmin-Hmax) (mm) 	500 - 750
Advised mounting height gas hobs (Hmin-Hmax) (mm)	650 - 750
 Advised mounting height ceramic hobs (Hmin-Hmax) (mm) 	500 - 750
Position exhaust	Тор

Lighting

■ Functional light dimmable	-
Soft-ON/OFF	-
Number of functional lights	2
 Total energy consumption functional light (W) 	7

Airflow and noise level


Free airflow (m³/h)	800
 Airflow (m³/h) measured according to EN 61591 	
 Sound regulation according to EN 60704-2-13 	
 Airflow duct out speed 1 (m³/h) 	126
 Airflow duct out speed 2 (m³/h) 	191
 Airflow duct out speed 3 (m³/h) 	418
 Airflow duct out max powerspeed (m³/h) (Qboost) 	478
Sound pressure duct out speed 1 (dB(A)) / Sound power duct out speed	34 / 45
1 (dB(A))	

Airflow and noise level

- Sound pressure duct out speed 2 (dB(A)) / Sound power duct out speed 45 / 55 2 (dB(A))
- $^{\bullet}$ Sound pressure duct out speed 3 (dB(A)) / Sound power duct out speed 53 / 64 3 (dB(A))
- ${}^\bullet$ Sound pressure duct out at max powerspeed (dB(A)) / Sound power duct 59 / 70 out at max powerspeed (dB(A)) (LWAboost)

Technical specifications

Maximum power (W)	325
Voltage appliance (V)	230
Frequency (Hz)	50
Power consumption in stand-by-mode (Ps) (W)	0.29
Net weight (kg)	31
Length power supply cable (m)	1,3

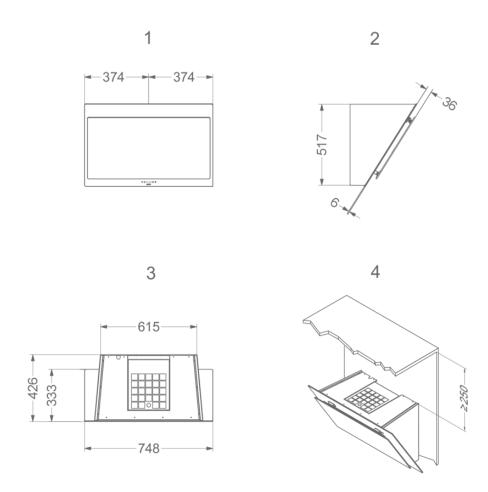

Control kit



990021

InTouch Kit incl. remote control

^{*} For duct work compatibilities & accessories visit www.novy.com