

**HR**  
**Andante 60 cm**  
**Stainless steel**

### Functions & features

▪ Control method	Push buttons
▪ Number of speeds	1
▪ Motor	Without
▪ Sound absorber	Without
▪ Auto stop	-
▪ Number of grease filters	2
▪ Grease filter cleaning indication	-
▪ Recirculation filter cleaning indication	-

### Dimensions

▪ Product dimensions exhaust (WxDxHmin-Hmax) (mm)	598 x 520 x 720 - 1150
▪ Product dimensions recirculation (WxDxHmin-Hmax) (mm)	598 x 520 x -
▪ Max height optional chimney exhaust (mm)	1470
▪ Advised mounting height ceramic hobs (Hmin-Hmax) (mm)	650 - 750
▪ Advised mounting height gas and induction hobs (Hmin-Hmax) (mm)	650 - 750
▪ Diameter outlet (mm)	125
▪ Position exhaust	Top

### Lighting





▪ Functional lighting type	Halogen
▪ Dimmable light	-
▪ Soft-ON/OFF	-
▪ Total energy consumption functional light (W)	40

### Airflow and noise level

▪ Airflow (m <sup>3</sup> /h) measured according to	
▪ Sound regulation according to EN 61591	
▪ Sound power speed 1 (dB(A)) / Sound pressure speed 1 (dB(A))	45 / 34

### Technical specifications

▪ Maximum power	130
▪ Voltage (V)	220-230
▪ Frequency (Hz)	50

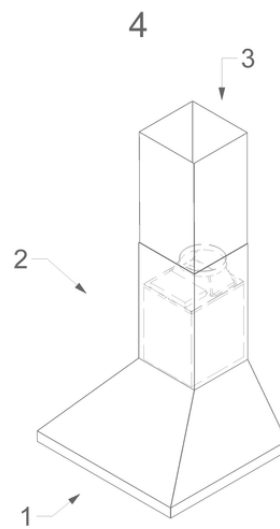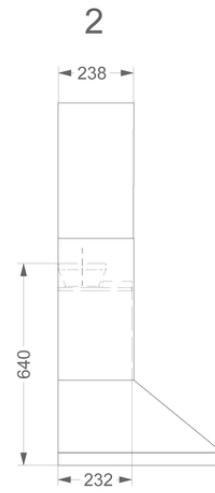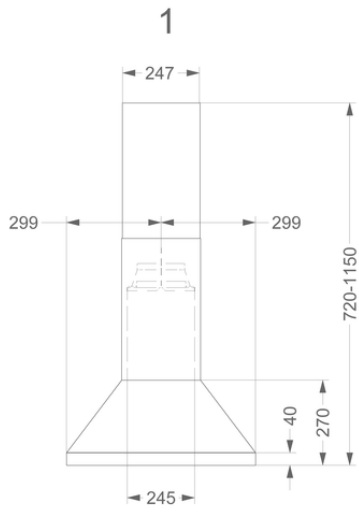

**Installation accessories**

---

**Back panel & chimney extensions**

- 140200

Back panel

